

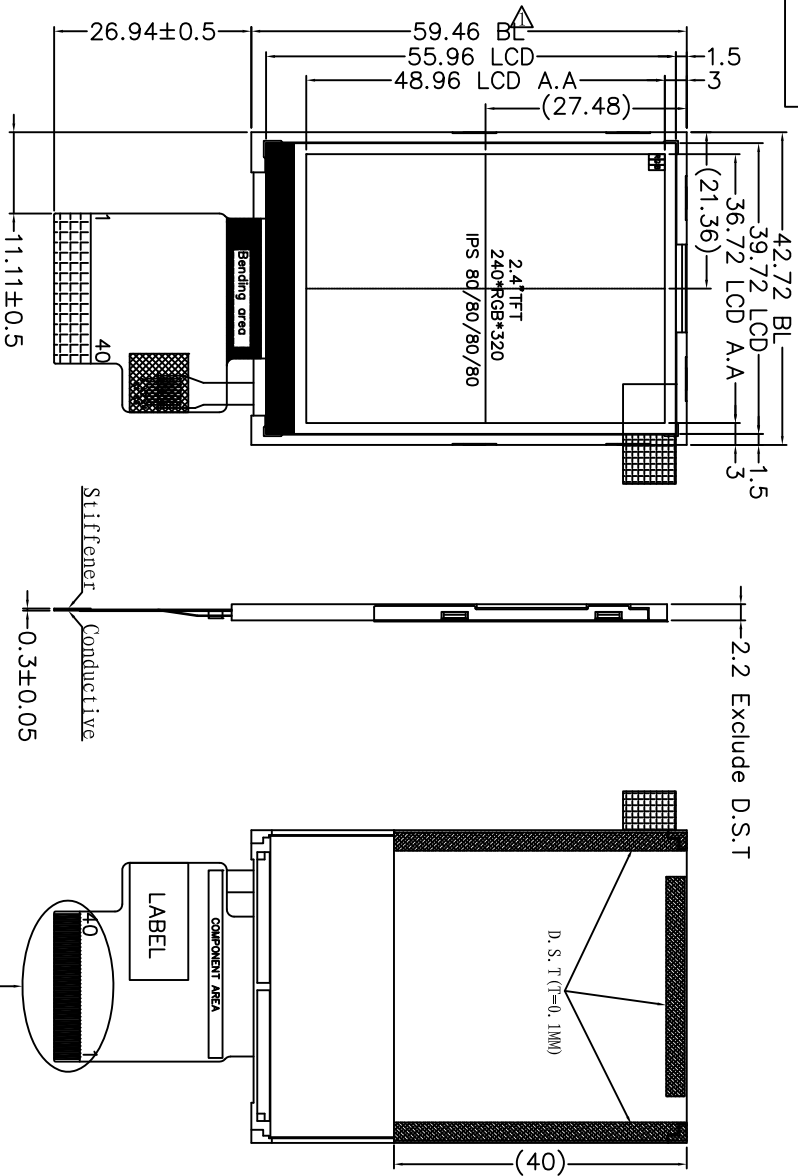


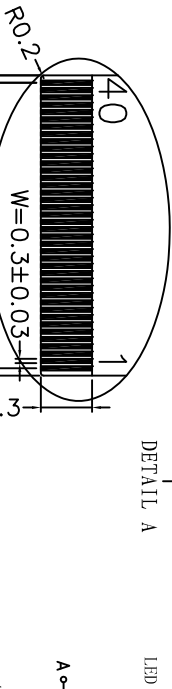

PIN ASSIGNMENT:

1	NC
2	IOVCC
3	DB17
4	DB16
5	DB15
6	DB14
7	DB13
8	DB12
9	DB11
10	DB10
11	DB9
12	DB8
13	DB7
14	DB6
15	DB5
16	DB4
17	DB3
18	DB2
19	DB1
20	DB0
21	SDA(SDI)
22	DOTCLK
23	DE
24	HSYNC
25	VSYNC
26	RD
27	WR(D/C)
28	DC(SCL)
29	CS
30	RESET
31	IMO
32	IM1
33	IM2
34	IM3
35	NC
36	GND
37	VCI
38	NC
39	LED-A
40	LED-K

LED CIRCUIT DIAGRAM:



- NOTES:
- DISPLAY TYPE: 2.4" TFT, TRANSMISSIVE
 - VIEWING DIRECTION : U/L/D/R 80/80/80/80
 - Driver IC : ILI9341V
 - Top : -20° C ~ 70° C, Tst : -30° C ~ 80° C
 - GENERAL TOLERANCE: ±0.2
 - LCM Luminance: LED/250cd/m² (Typical)

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL	ALL UNITS:	DATE	MODEL NUMBER :	PROJECTION	SHEET: 1 OF 1
0.30	MM		MLT024Q40-2		
DWN:					
CHK:					
APP:			DO NOT SCALE THIS DRAWING.		DATE: