



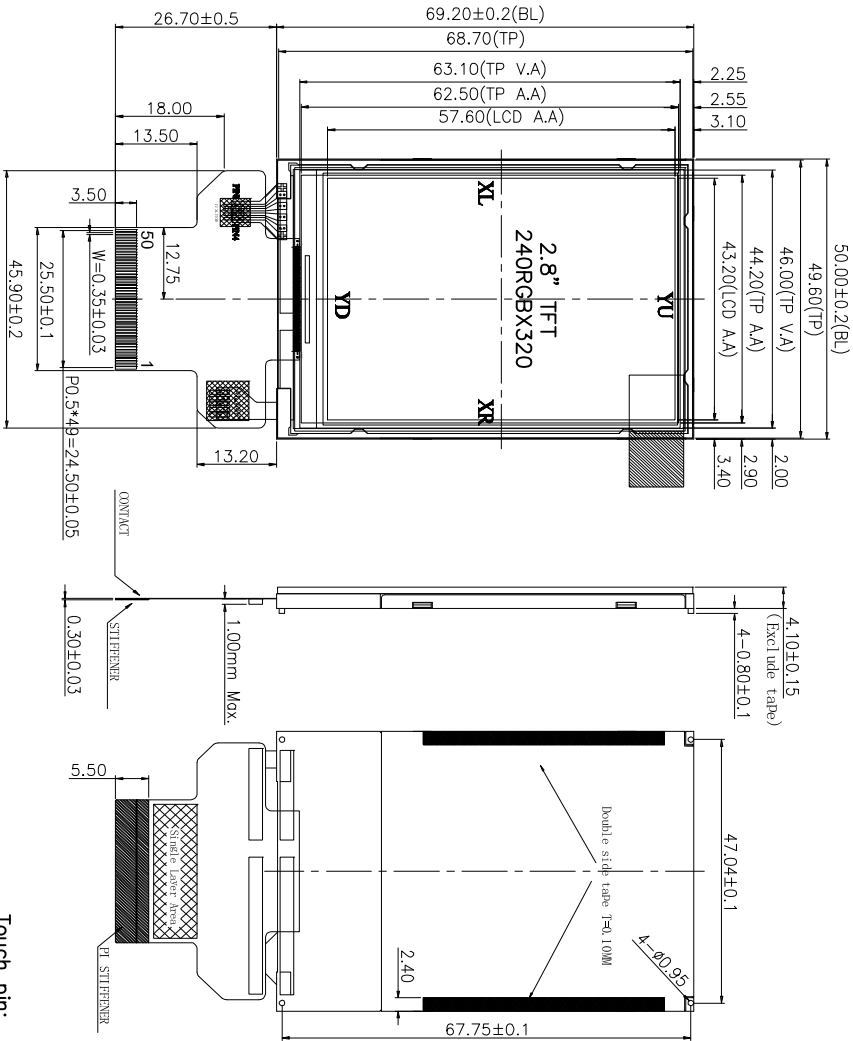

Touch pin:


NO.	SYMBOL
1	YU
2	XL
3	YD
4	XR

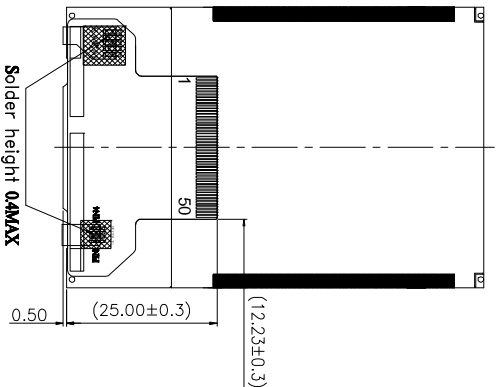

1	LEDK	26	DB6
2	LEDA1	27	DB5
3	LEDA2	28	DB4
4	LEDA3	29	DB3
5	LEDA4	30	DB2
6	IMO	31	DB1
7	IM1	32	DB0
8	IM2	33	S00
9	IM3	34	S01
10	RESET	35	RD
11	VSYNC	36	WRX(D/CX)
12	HSYNC	37	D/CX(SCL)
13	DOTCLK	38	CSX
14	DE	39	TE
15	DBI 7	40	VDDI
16	DBI 6	41	VDDI
17	DBI 5	42	VCI
18	DBI 4	43	GND
19	DBI 3	44	X+
20	DBI 2	45	Y+
21	DBI 1	46	X-
22	DBI 0	47	Y-
23	DB9	48	GND
24	DB8	49	GND
25	DB7	50	GND

Backlight circuit:

U=3.2V I=4*20mA



FPC bending

Unbend to delivery

- NOTES:
- DISPLAY TYPE: 2.8" TFT_LCD/TRANSMISSIVE
 - OPERATING TEMPERATURE: -20°C~70°C
 - STORAGE TEMPERATURE: -30°C~80°C
 - VIEWING ANGLE: 12 0'CLOCK
 - BACKLIGHT BRIGHTNESS: 250CD/M2
 - DRIVER: ILI9341V
 - RESOLUTION: 240(RGB)X320
 - CONNECTOR: FPC
 - UNMARK TOLERANCES: ±0.03MM

MACLIGHT DISPLAY CO., LIMITED