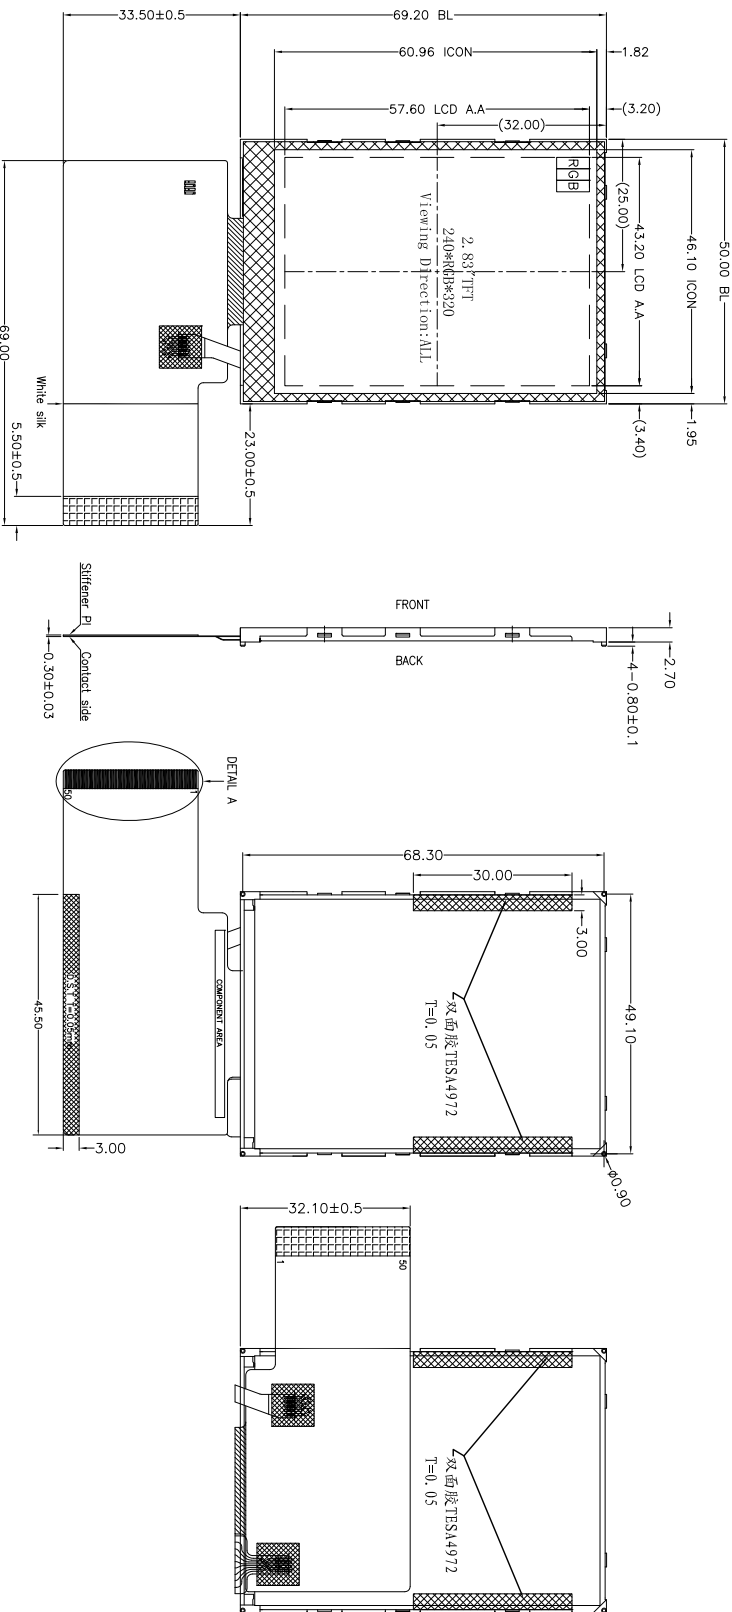


PIN ASSIGNMENT:	
No.	PIN NAME
1	GND
2	XR
3	YD
4	XL
5	YU
6	IOVCC
7	IOVCC
8	VCI
9	VCI
10	IM2
11	IM1
12	IMO
13	RESET
14	CS
15	RS/SPN_SCL
16	WR/SPN_RS
17	RD
18	V5VNC
19	HSYNC
20	ENABLE
21	DOTCLK
22	SDA
23	DB0(B0)
24	DB1(B1)
25	DB2(B2)
26	DB3(B4)
27	DB4(B4)
28	DB5(B5)
29	DB6(B0)
30	DB7(G1)
31	DB8(G2)
32	DB9(G3)
33	DB10(G4)
34	DB11(G5)
35	DB12(R0)
36	DB13(R1)
37	DB14(R2)
38	DB15(R3)
39	DB16(R4)
40	DB17(R5)
41	SDD
42	GND
43	LEDA
44	LEDK1
45	LEDK2
46	LEDK3
47	LEDK4
48	NC
49	NC
50	GND

IM3=1
EXTC=1

NOTES:

- DISPLAY TYPE: 2.8" TFT, NORMALLY BLACK
- VIEWING DIRECTION : U/L/D/R 80/80/80/80
- Driver IC : ILI9341V
- Top : -20° C ~ 70° C, Tst : -30° C ~ 80° C
- GENERAL TOLERANCE: ±0.2
- LCM Luminance: LED/500cd/m² (Typical)

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL ALL UNITS:		DATE	MODEL NUMBER :		PROJECTION	SHEET: 1 OF 1	
0.30	MM		DWN:	MLT028Q50-15 V2		DATE:	
CHK:			APP:		DO NOT SCALE THIS DRAWING.		

特殊工艺: