




PIN	FUNCTION SYMBOL
1	WLED-
2	WLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	X1
38	Y1
39	X2
40	Y2

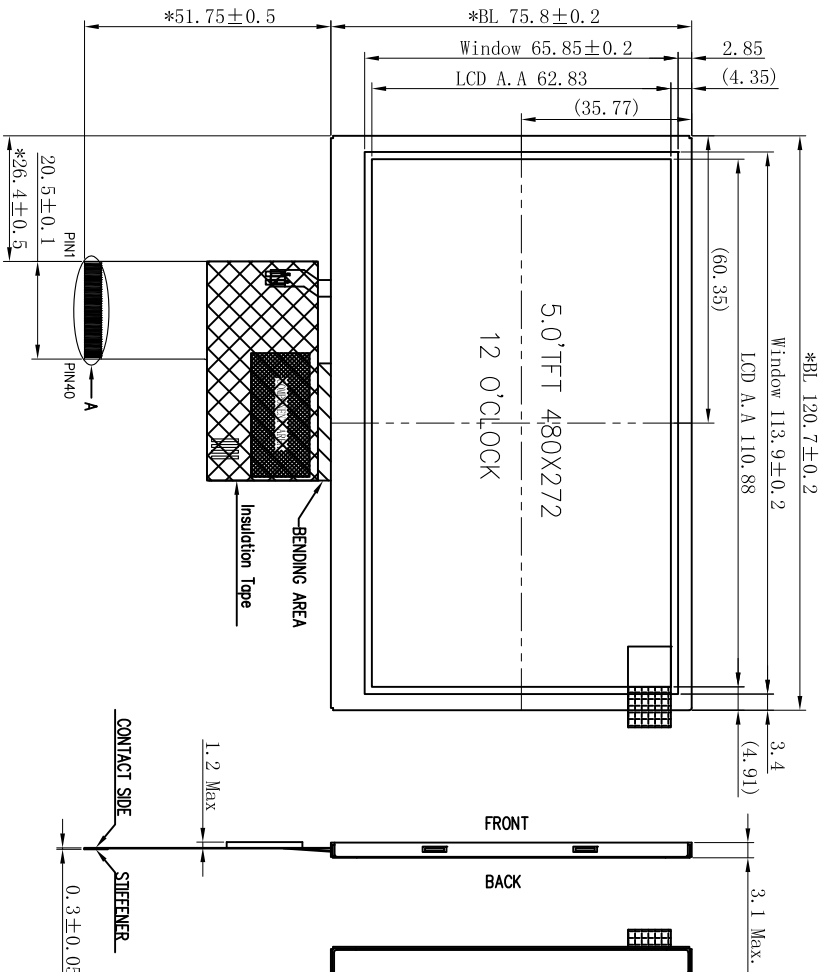

- NOTES:
1. DISPLAY TYPE: 5.0TFT, TRANSMISSIVE
 2. VIEWING DIRECTION : U/L/D/R 65/65/55/65
 3. Driver IC : HX8257A01M
 4. Top : -20° C ~ 70° C, Tst : -30° C ~ 80° C
 5. GENERAL TOLERANCE: ±0.2
 6. LCM Luminance: LED/400cd/m² (Typical)

DETAIL: A

 MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL 0.30		ALL UNITS: MM	DATE	MODEL NUMBER : MLT050R40-2				SHEET: 1 OF 1	
DWN:				CHK:				DATE:	
APP:				DO NOT SCALE THIS DRAWING.		PROJECTION			

特殊工艺: