

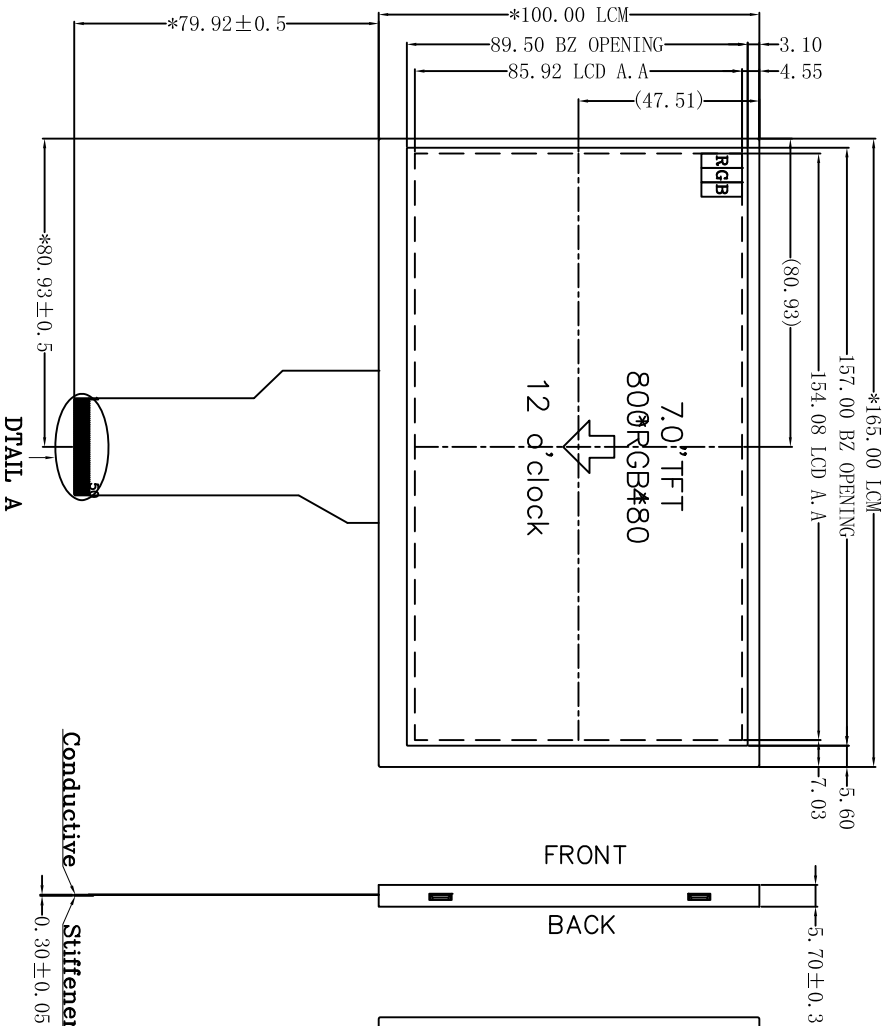




50PIN:	
PIN	SYMBOL
1	V1A0+
2	V1A0+
3	V1A0+
4	V1A0+
5	V1A0+
6	V1A0+
7	V1A0+
8	V1A0+
9	V1A0+
10	V1A0+
11	V1A0+
12	V1A0+
13	V1A0+
14	V1A0+
15	V1A0+
16	V1A0+
17	V1A0+
18	V1A0+
19	V1A0+
20	V1A0+
21	V1A0+
22	V1A0+
23	V1A0+
24	V1A0+
25	V1A0+
26	V1A0+
27	V1A0+
28	V1A0+
29	V1A0+
30	V1A0+
31	V1A0+
32	V1A0+
33	V1A0+
34	V1A0+
35	V1A0+
36	V1A0+
37	V1A0+
38	V1A0+
39	V1A0+
40	V1A0+
41	V1A0+
42	V1A0+
43	V1A0+
44	V1A0+
45	V1A0+
46	V1A0+
47	V1A0+
48	V1A0+
49	V1A0+
50	V1A0+

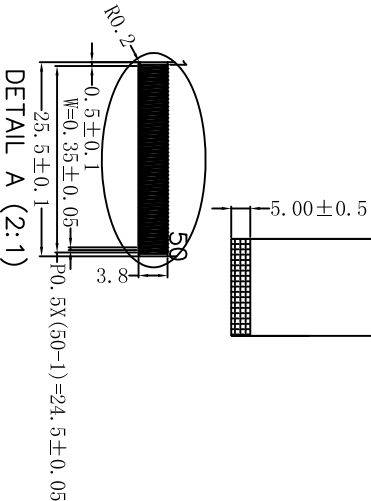

- NOTES:
1. DISPLAY TYPE: 7.0" TFT, TRANSMISSIVE
 2. VIEWING DIRECTION : U/L/D/R 65/65/55/65
 3. Driver IC : N/A
 4. Top : -20° C ~ 70° C, Tst : -30° C ~ 80° C
 5. GENERAL TOLERANCE: ±0.2
 6. LCM Luminance: LED/450cd/m² (Typical)

特殊工艺:

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOTAL UNITS	DATE	MODEL NUMBER :	PROJECTION	SHEET: 1 OF 1
0.30 MM		MLT070W50-21		
DWN:				
CHK:				
APP:		DO NOT SCALE THIS DRAWING.		DATE: