
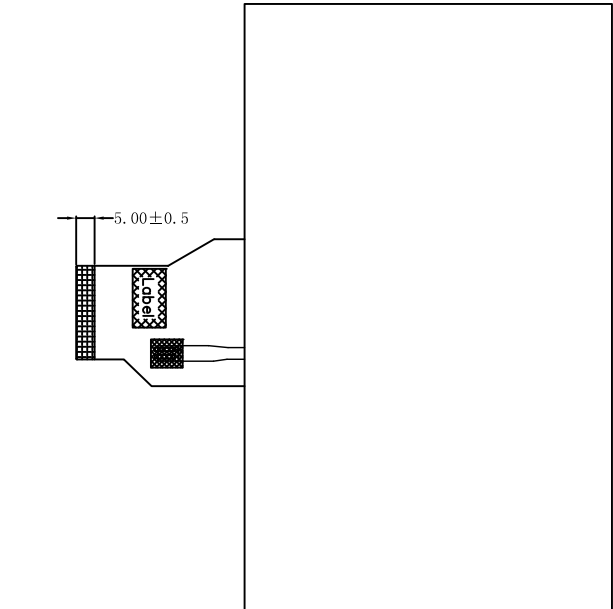
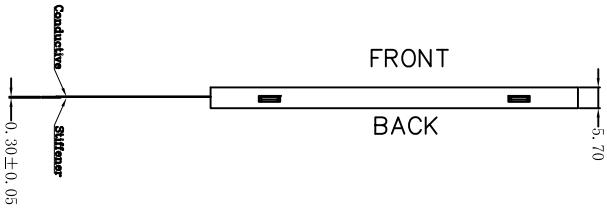


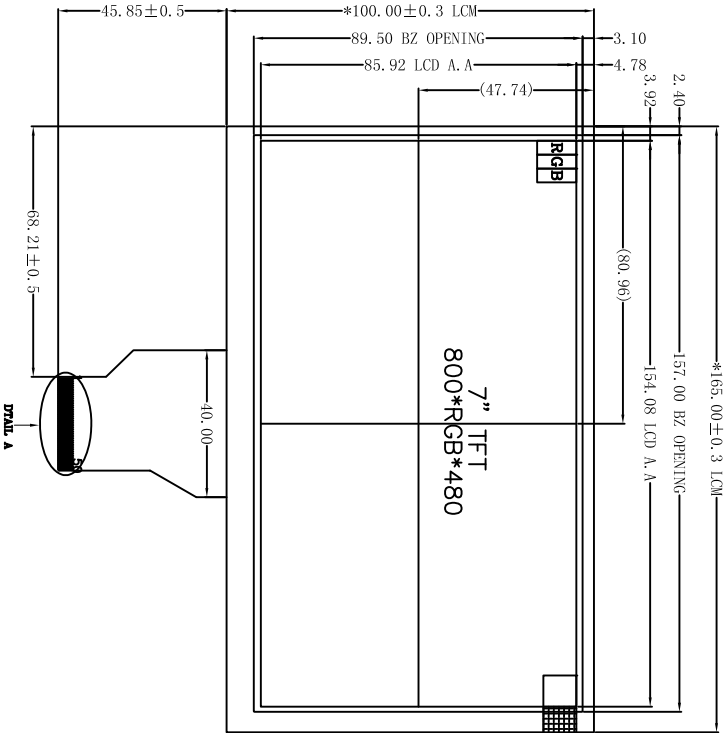

50PIN:	
PIN SYMBOL	
1 VLED+	
2 VLED+	
3 VLED+	
4 VLED-	
5 VLED-	
6 GND	
7 VCOM	
8 VDD	
9 NC	
10 NC	
11 NC	
12 NC	
13 NC	
14 NC	
15 NC	
16 NC	
17 NC	
18 BL	
19 NC	
20 G7	
21 G6	
22 G5	
23 G4	
24 G3	
25 G2	
26 G1	
27 G0	
28 G7	
29 G6	
30 G5	
31 G4	
32 G3	
33 G2	
34 BL	
35 R0	
36 GND	
37 DCLK	
38 GND	
39 L/R	
40 U/D	
41 VGH	
42 VGL	
43 AVDD	
44 RESET	
45 NC	
46 VCOM	
47 DITHB	
48 GND	
49 NC	
50 NC	

NOTES:

1. DISPLAY TYPE: 7.0TFT, TRANSMISSIVE
2. VIEWING DIRECTION : U/L/D/R 65/65/55/65
3. Driver IC : GATE HX8664-B & SOURCE HX8264-E
4. Top : -20° C ~ 70° C, Tst : -30° C ~ 80° C
5. GENERAL TOLERANCE: ± 0.2
6. LCM Luminance:LED/500cd/m² (Typical)

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOLALL. UNITS:		DATE	MODEL NUMBER :		SHEET: 1 OF 1	
0.30	MM		MLT070W50-22		DATE:	
DWN:						
CHK:						
APP:			DO NOT SCALE THIS DRAWING.	PROJECTION		

特殊工艺: