

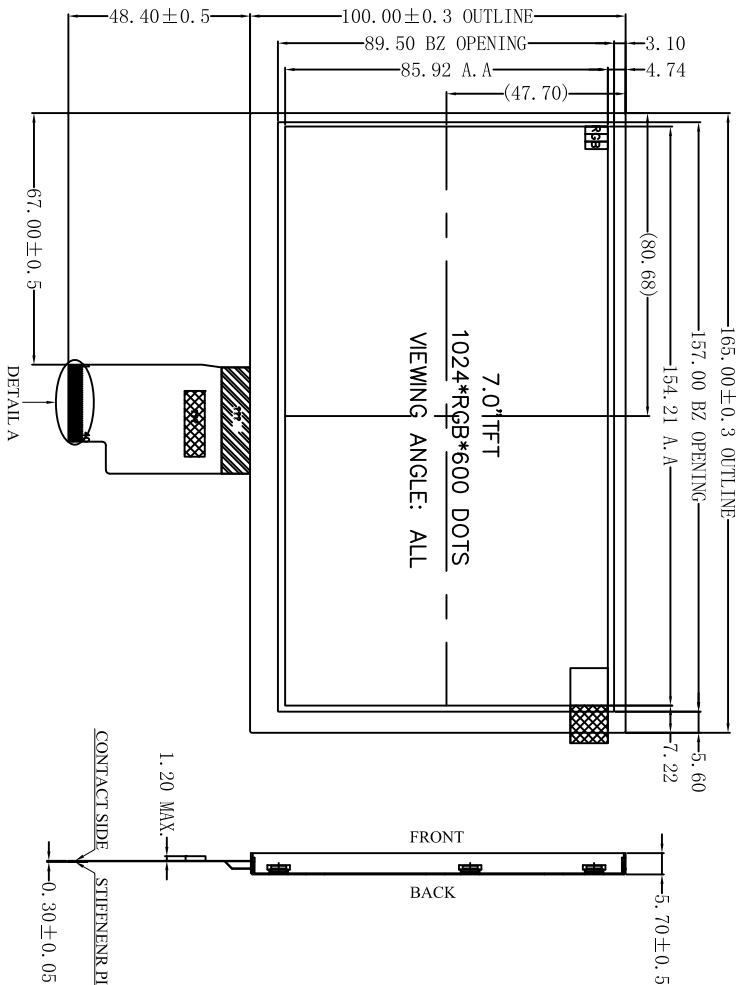
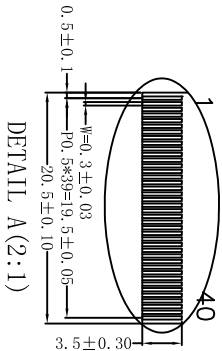





PIN	FUNCTION
1	VCOM
2	VDD
3	VDD
4	NC
5	RESET
6	SIBYB
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	REGIOIN+
18	REGIOIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	DIM0
28	SLP(PS0)
29	AVDD
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	VGL
36	NC
37	NC
38	VGH
39	LED+
40	LED+

- NOTES:
1. DISPLAY TYPE: 7.0TFT, NORMALLY BLACK
 2. VIEWING DIRECTION : U/L/D/R 80/80/80/80
 3. TFT Driver IC : HX8282A11/HX8696A01
 4. Top : -20° C ~ 70° C, Tst : -30° C ~ 80° C
 5. GENERAL TOLERANCE: ±0.2
 6. LCM Luminance:500cd/m² (Typical)

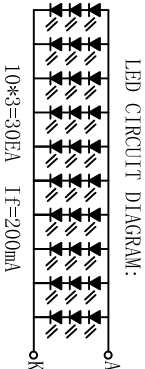

 MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL	ALL UNITS:	DATE	MODEL NUMBER :	PROJECTION	SHEET: 1 OF 1
0.30	MM		MLT070X40-18		
DWN:					
CHK:					
APP:			DO NOT SCALE THIS DRAWING.		DATE:

特殊工艺: