
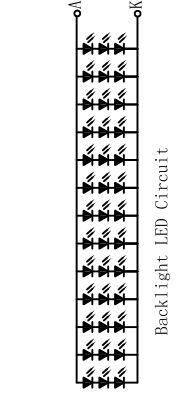
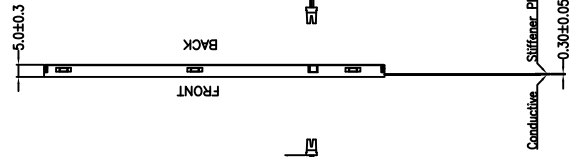


DATE: _____

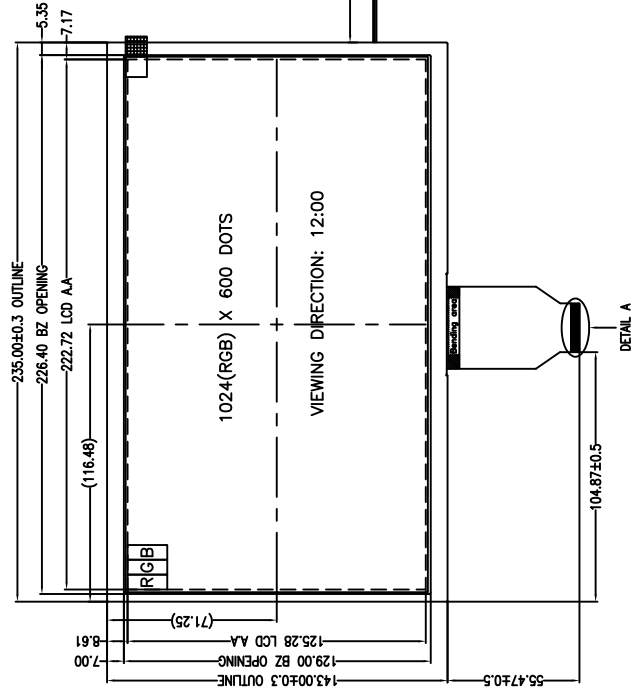

PIN	FUNCTION
PIN SYMBOL	
1	VCOM
2	VDD
3	VDD
4	NC
5	REST
6	STBYB
7	GND
8	Rxin0-
9	Rxin0+
10	GND
11	Rxin1-
12	Rxin1+
13	GND
14	Rxin2-
15	Rxin2+
16	GND
17	RxCLK-
18	RxCLK+
19	GND
20	Rxin3-
21	Rxin3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	DIM0/NC
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	VGL
36	CABEN0/NC
37	CABEN0/NC
38	VGH
39	LED+
40	IFD+

1. DISPLAY TYPE: TFT
2. VIEWING DIRECTION: 12:00
3. LCD DRIVE IC:Source HX8282-A14 Gate:HX8696-A
4. POLARIZER MODE: TRANSMISSIVE/POSITIVE
5. VDD : 3.3V
6. BACKLIGHT: 39 PCS LEDS
7. OPERATING TEMP: 0° C ~+50° C
8. STORAGE TEMP: -20° C ~+60° C
9. UNMARKER TOLERANCE: ± 0.20
UNMARKED FILLET RADIUS: R=0.50
- 10.FPC CONNECTOR REFERENCE

UNMARKED FILLET RADIUS: R=0.50

10. FPC CONNECTOR REFERENCE

 MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL		ALL UNITS: MM	DATE	MODEL NUMBER : MLT101X40-13		SHEET: OF 1
0.30						
DWN:						
CHK:						
APP:				DO NOT SCALE THIS DRAWING.	PROJECTION	DATE:

特殊工艺: