


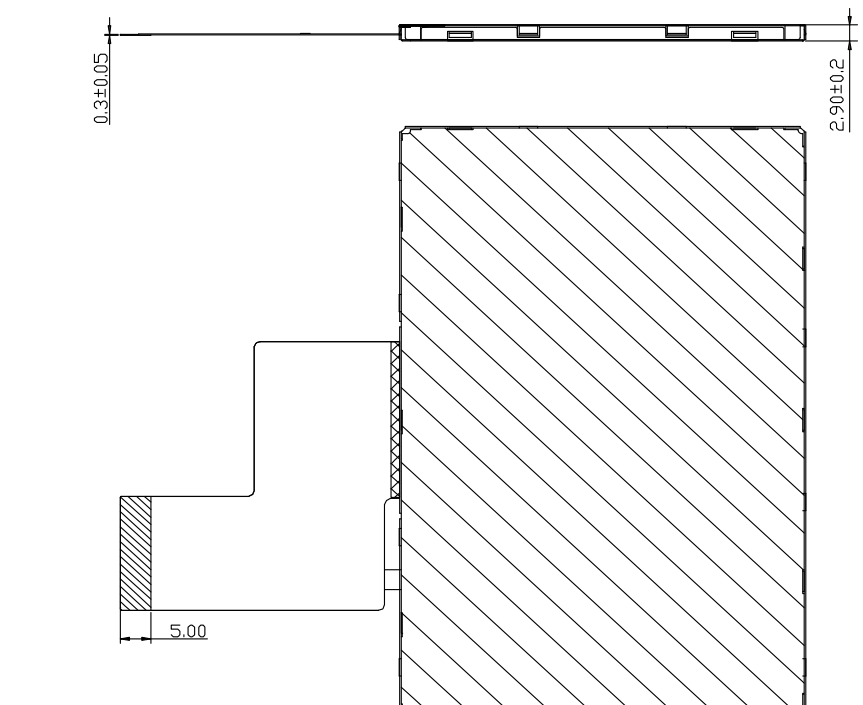

No	PIN NAME
1	LEDK
2	LEDJ
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	R0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	NC
38	NC
39	NC
40	NC

- | | |
|---------------------------|-----------------------------|
| NOTES: | |
| 1. DISPLAY TYPE: | 4.3" TFT_LCD / TRANSMISSIVE |
| 2. LCD OPERATING VOLTAGE: | 3.3V |
| 3. OPERATING TEMPERATURE: | -20°C ~ 70°C |
| 4. STORAGE TEMPERATURE: | -30°C ~ 80°C |
| 5. VIEWING ANGLE: | 12_0° C/CLOCK |
| 6. BACKLIGHT BRIGHTNESS: | 250CD / M2 |
| 7. DRIVER: | 07A5180A |
| 8. RESOLUTION: | 480(RGB)X272 |
| 9. CONNECTOR: | FPC |
| 10. UNMARK TOLERANCES: | ±0.03MM |

特殊工艺:

GENERAL TOL 0.30		ALL UNITS: MM	DATE	MODEL NUMBER : MLT043R40-12 V3	 PROJECTION	SHEET: 1 OF 1 DATE:
DWN:						
CHK:						
APP:				DO NOT SCALE THIS DRAWING.		