

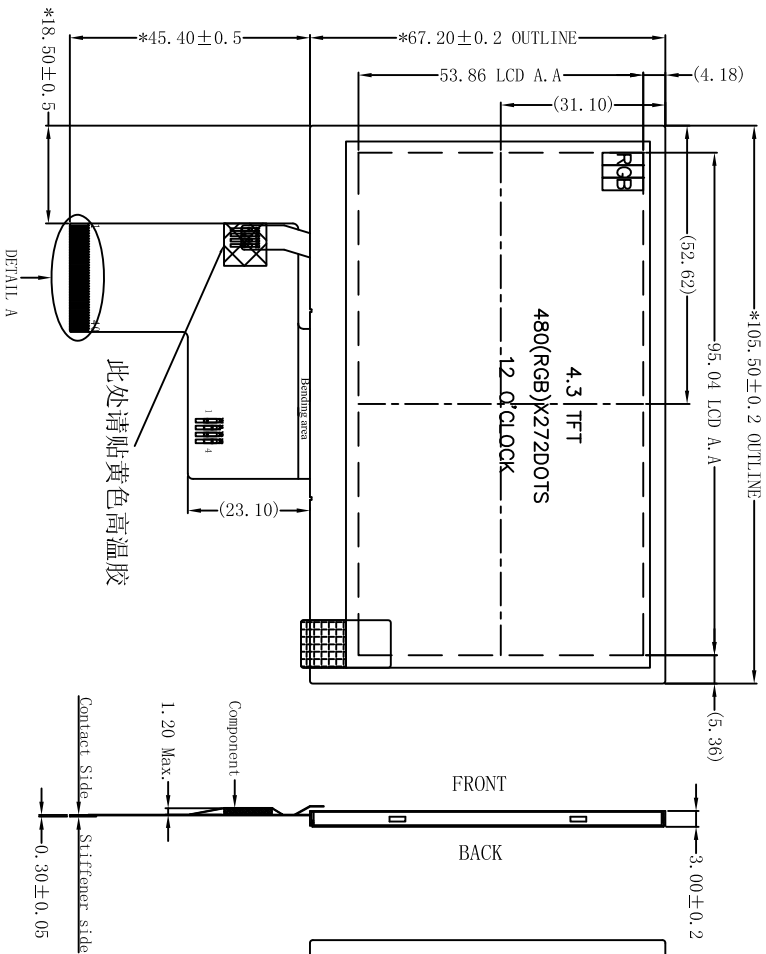





备注:元器件, 焊盘请用黄色高温胶贴附.

PIN	FUCTION
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

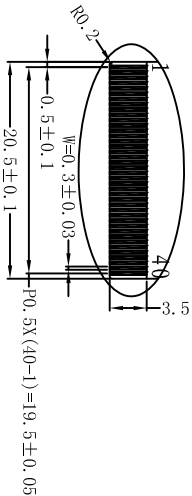

- NOTES:
- DISPLAY TYPE: 4.3" TFT, TRANSMISSIVE
 - VIEWING DIRECTION : U/L/D/R 65/65/55/65
 - Driver IC : ST7282
 - Top : -20° C ~ 70° C, Tst : -30° C ~ 80° C
 - GENERAL TOLERANCE: ±0.2
 - LCM Luminance: LED/420cd/m² (Typical)

 MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL		ALL UNITS:	DATE	MODEL NUMBER :		SHEET: 1 OF 1
0.30	MM					
DWN:				MLT043R40-26		
CHK:						
APP:				DO NOT SCALE THIS DRAWING.	PROJECTION	DATE:

特殊工艺: