
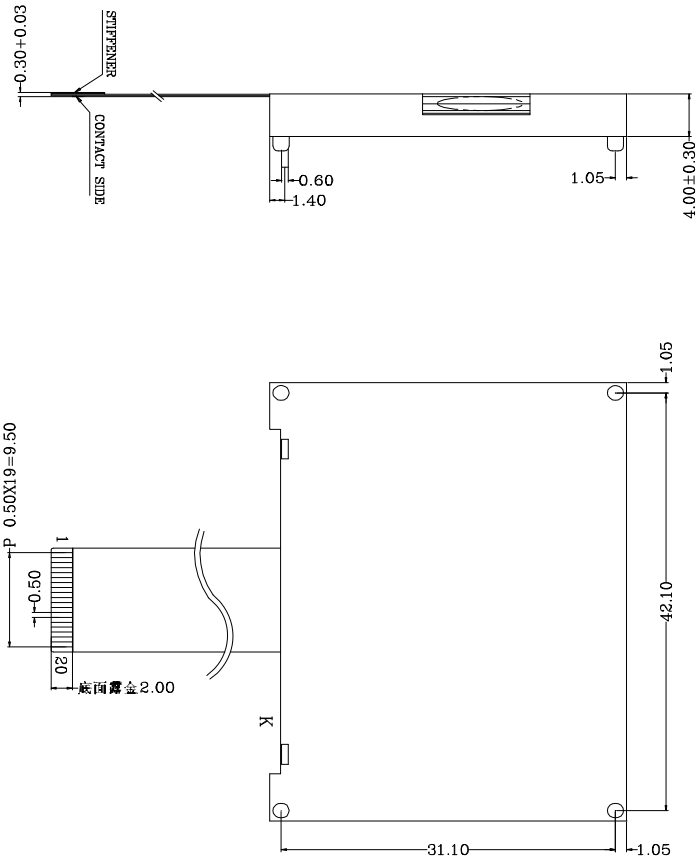
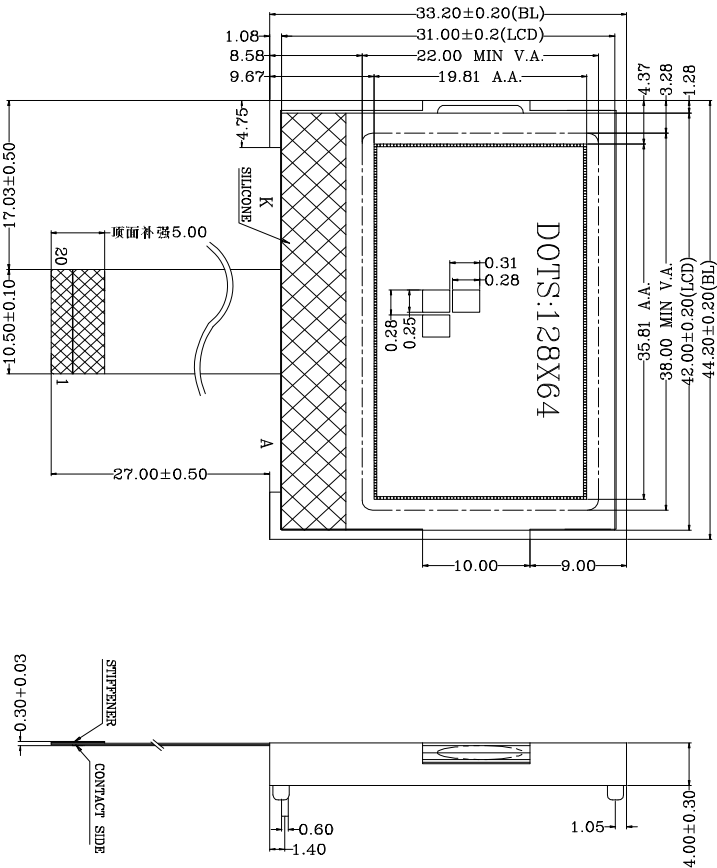


20	P/S
19	C86
18	V0
17	V1
16	V2
15	V3
14	V4
13	CAP2N
12	CAP2P
11	CAP1P
10	CAP1N
9	CAP3P
8	VOUT
7	VSS
6	VDD
5	D7
4	D6
3	A0
2	RST
1	CS

Backlight circuit (3.0V, CURRENT: 30MA)



NOTES:

1. DISPLAY TYPE: STN/TRANSMISSIVE
2. OPERATING TEMPERATURE: -20°C~70°C
3. STORAGE TEMPERATURE: -30°C~80°C
4. OPERATING VOLTAGE: 3.0V
5. VIEWING ANGLE: 6:00~0'CLOCK
6. DRIVING METHOD: 1/64 DUTY 1/9 BIAS
7. DRIVER: ST7565R
8. RESOLUTION: 128X64
9. CONNECTOR: FPC
10. UNMARK TOLERANCES: ±0.03MM

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL	ALL UNITS:	DATE	MODEL NUMBER :	SHEET: 1 OF 1
0.30	MM		MLG12864J-4	
DWN:				
CHK:				
APP:		DO NOT SCALE THIS DRAWING.	PROJECTION	DATE:

特殊工艺: