



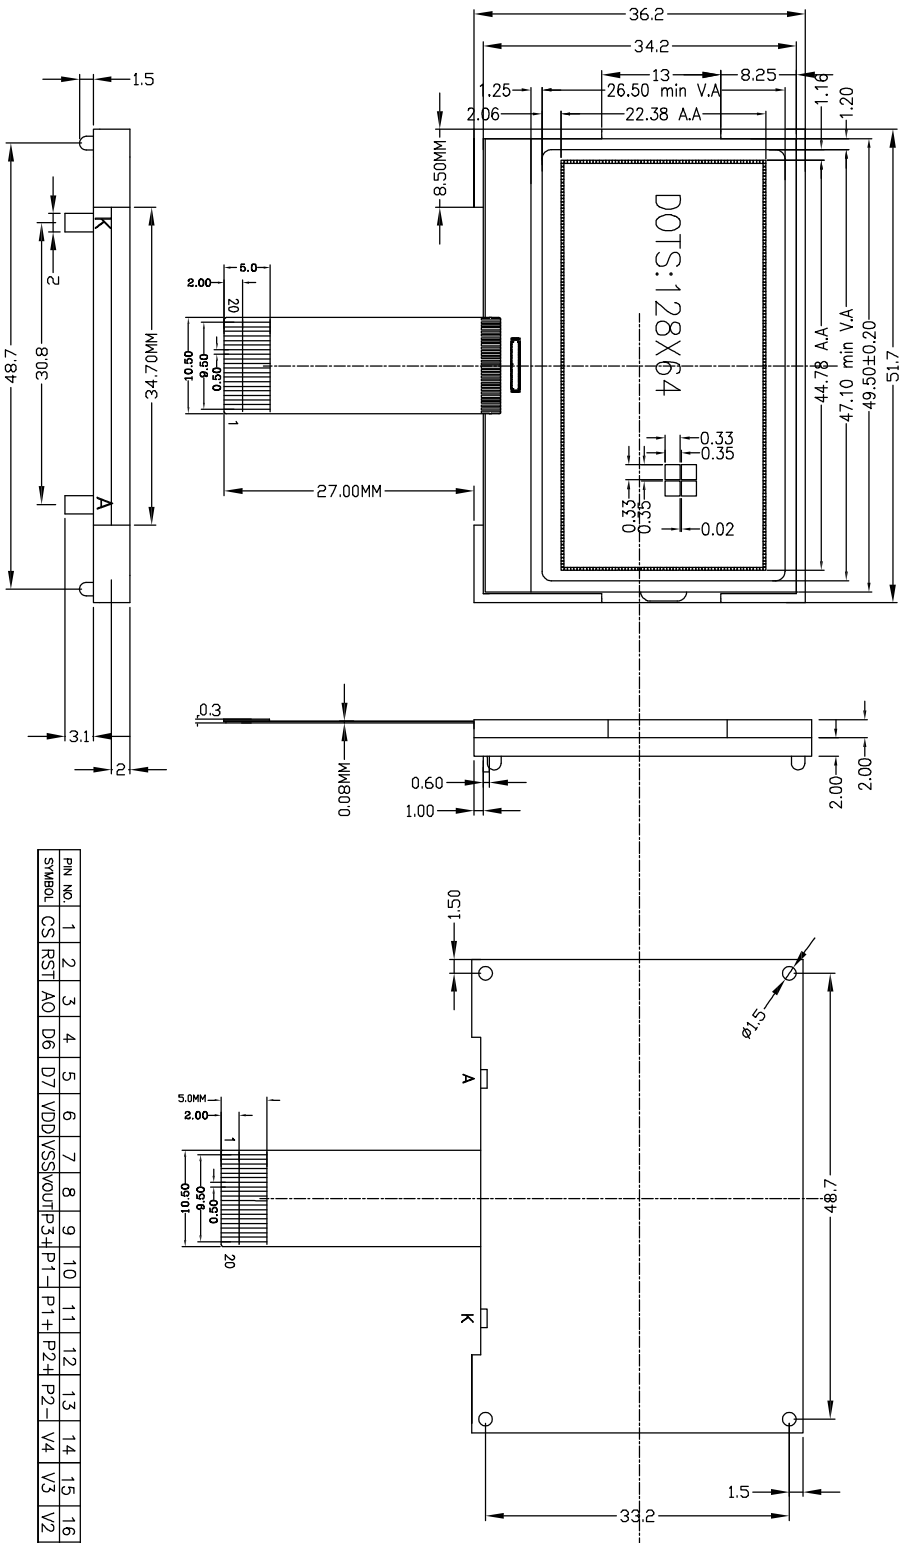

DISPLAY TYPE: FSTN
POLARIZER: TRANSPARENT
VIEWING DIRECTION: 6:00-CLOCK
DRIVE METHOD: 1/64DUTY,1/9BIAS
OPERATING VOLTAGE: 3.0V
OPERATING TEMP: -20 TO +70 Deg.C
STORAGE TEMP: -30 TO +80 Deg.C
CONNECTOR: COG+PIN
UNSIGNED TOLERANCE: ±0.20
CONTROLLER: ST7566R
LED BACKLIGHT: WHITE
LED BACKLIGHT OPERATING VOLTAGE: 3.0V
LED BACKLIGHT OPERATING ELECTRIC CURRENT: ≤30mA



PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
SYMBOL	CS	RST	AO	D6	D7	VDD	VSS	VOU	P3	P1	P2	P2	V4	V3	V2	V1	VO	VDD	VSS	

MACLIGHT DISPLAY CO., LIMITED

GENERAL	TOTAL	UNITS	DATE	MODEL NUMBER :	SHEET: 1 OF 1
0.20	MM			MLG12864J-3	
CHK:				PROJECTION	DATE:
APP:				DO NOT SCALE THIS DRAWING.	

特殊工艺: