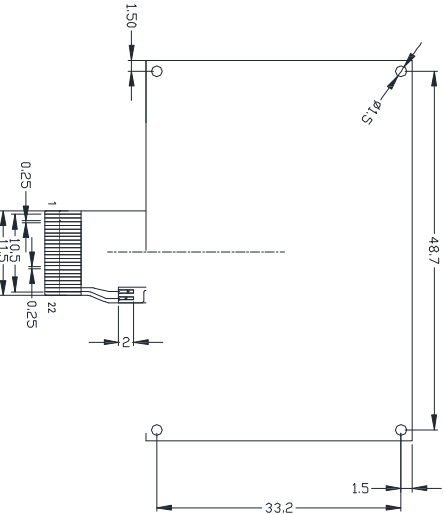
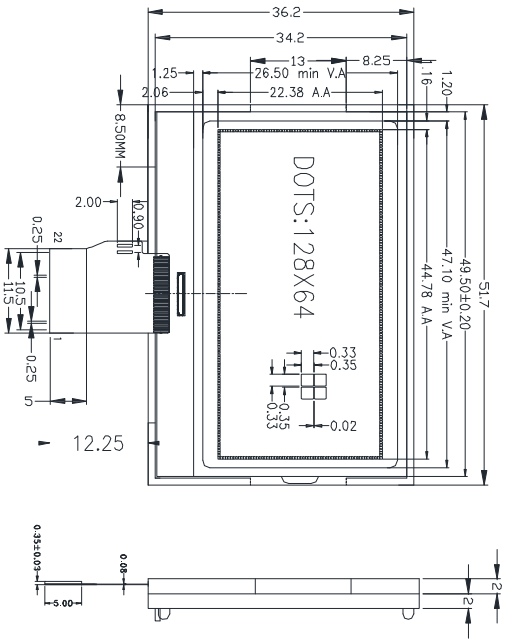


接口定义:

22	K
21	A
20	VSS
19	VDD
18	V0
17	V1
16	V2
15	V3
14	V4
13	CAP2N
12	CAP2P
11	CAP1P
10	CAP1N
9	CAP3P
8	VOU _T
7	VSS
6	VDD
5	D7
4	D6
3	A0
2	RST
1	CS

DISPLAY TYPE: FSTN
POLARIZER: TRANSPARENT
VIEWING DIRECTION: 6:00-CLOCK
DRIVE METHOD: 1/64DUTY 1/9BIAS
OPERATING VOLTAGE: 3.0V
STORAGE TEMP: -30 TO +70 Deg.C
CONNECTOR: COG+PIN
UNDESIGNED TOLERANCE: ±0.20
CONTROLLER: ST7565K
LED BACKLIGHT: BUS
LED BACKLIGHT OPERATING VOLTAGE: 3.0V
LED BACKLIGHT OPERATING ELECTRIC CURRENT: 30MA(MAX)

特殊工艺:

**MACLIGHT DISPLAY CO., LIMITED**

GENERAL TOLL UNIT	DATE	MODEL NUMBER :		SHEET: 1 OF 1
DRAWN:		MLG12864J-6		
CHK:				
APP:		DD NOT SCALE THIS DRAWING	PROJECTION	DATE: