
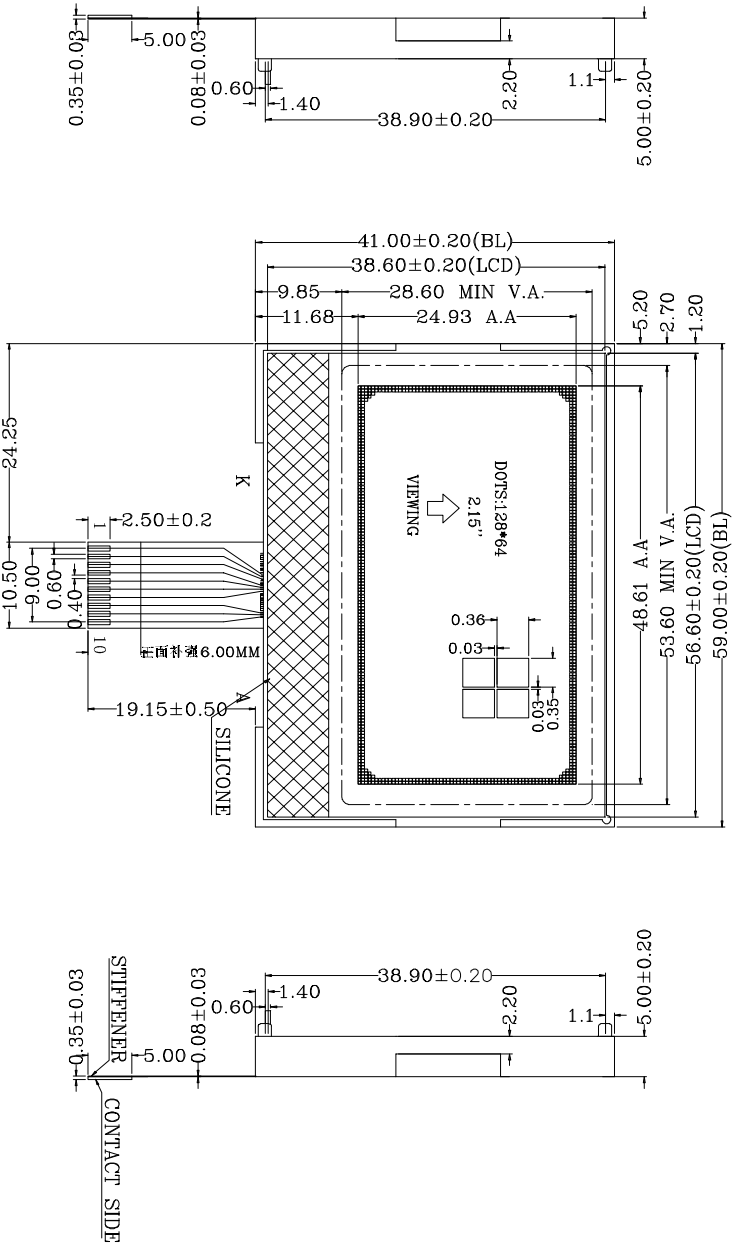


ALL PAGES OF THIS VERSION APPROVED

SIGNATURE: DATE:

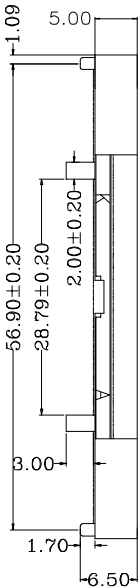


PIN NO.	SYMBOL
1	VG
2	XV0
3	V0
4	VSS
5	VDD
6	D7
7	D6
8	A0
9	RES
10	CS

NOTES:

1. DISPLAY TYPE: STN/TRANSPARENT
2. LCD OPERATING VOLTAGE: 3.0V
3. OPERATING TEMPERATURE: -20°C~70°C
4. STORAGE TEMPERATURE: -30°C~80°C
5. VIEWING ANGLE: 6:00
6. BACKLIGHT: 3 WHITE CHIPS, 3.0V, 24~60mA
7. DRIVING MODE: 1/64DUTY, 1/9BIAS, VOP=8.2V
8. RESOLUTION: 128X64DOTS
9. DRIVER: ST7567
10. CONNECTOR: FPC
11. UNMARK TOLERANCES: ±0.03MM

特殊工艺:



MACLIGHT DISPLAY CO., LIMITED

GENERAL	TOTAL	UNITS	DATE	MODEL NUMBER	PROJECTION	SHEET	DATE
0.30	MM			MLG12864J-8		1 OF 1	
CHK:							
APP:							