


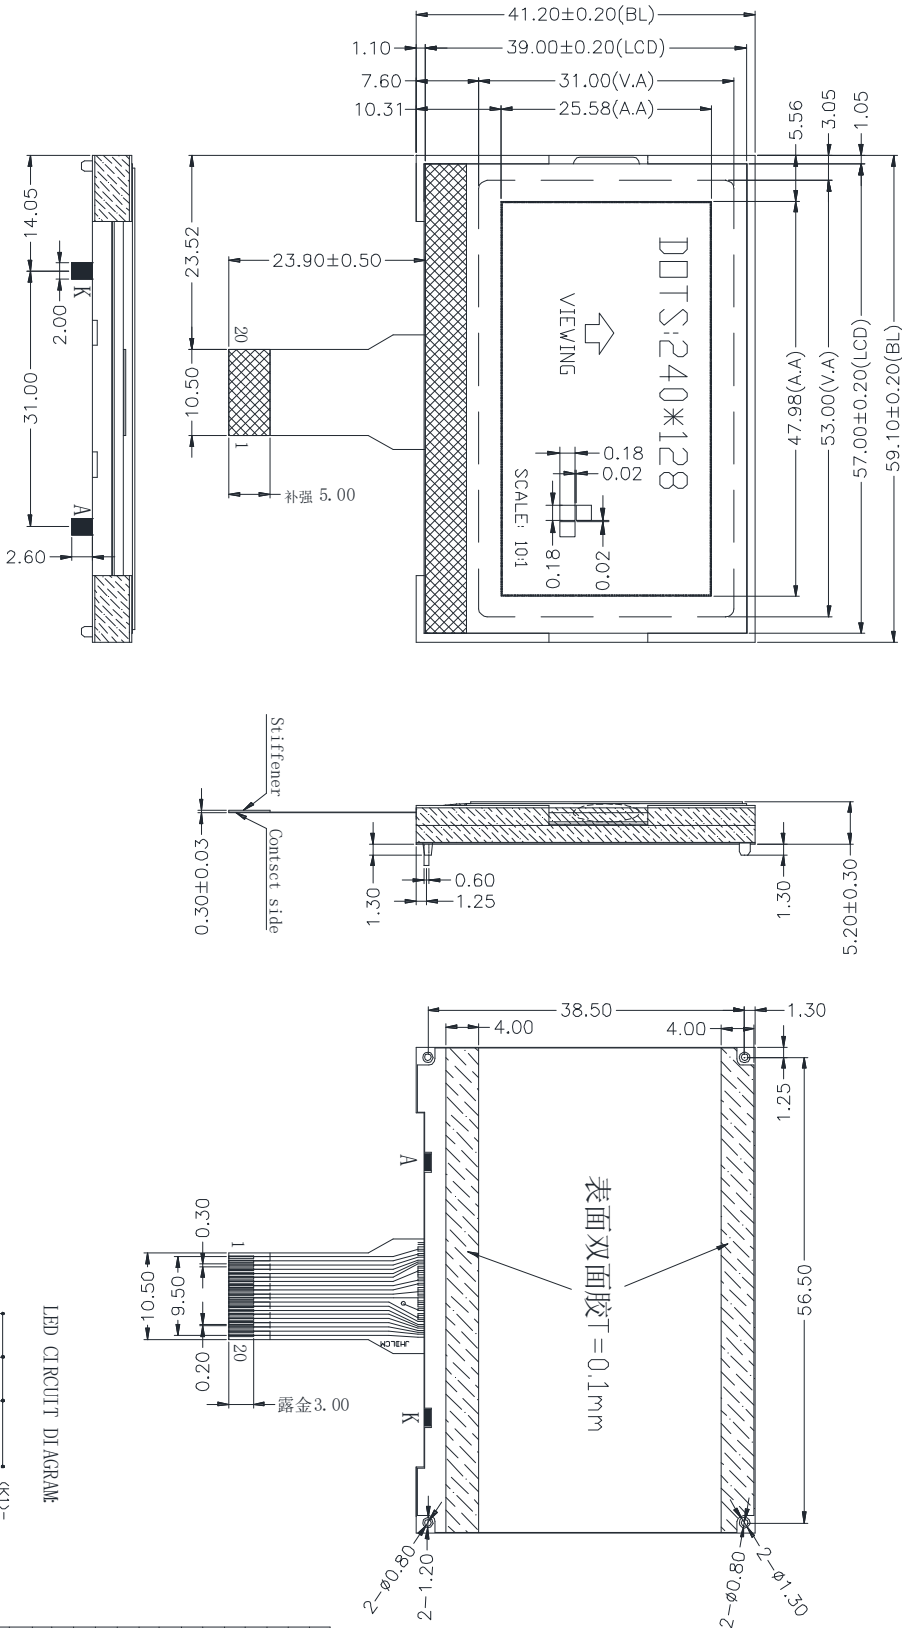

NOTES:

- 1.DISPLAY TYPE: FSTN/POSITIVE
- 2.POLARIZER: TRANSPARENT
- 3.VIEWING DIRECTION: 6:00-CLOCK
- 4.DRIVE METHOD: 1/12BDUTY,1/12BIAS
- 5.OPERATING VOLTAGE: 3.0V
- 6.OPERATING TEMP: -30°C TO 80 °C
- 7.STORAGE TEMP: -35°C TO 85 °C
- 8.DRIVE: UC1638C
- 9.UNSIGNED TOLERANCE: ±0.20
- 10.LED BACKLIGHT: WHITE
- 11.LED BACKLIGHT OPERATING VOLTAGE: 3.0V
- 12.LED BACKLIGHT OPERATING ELECTRIC CURRENT: ≤45MA

特殊工艺:

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL. ALL UNITS: 0.30 MM		DATE	MODEL NUMBER :	PROJECTION	SHEET: 1 OF 1
DWN:			MLG240128J-4		
CHK:					
APP:			DO NOT SCALE THIS DRAWING.		DATE: