

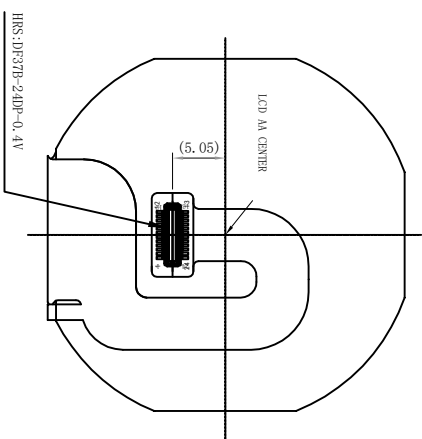
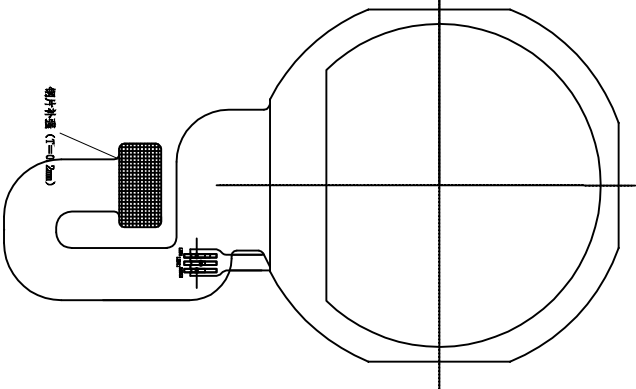


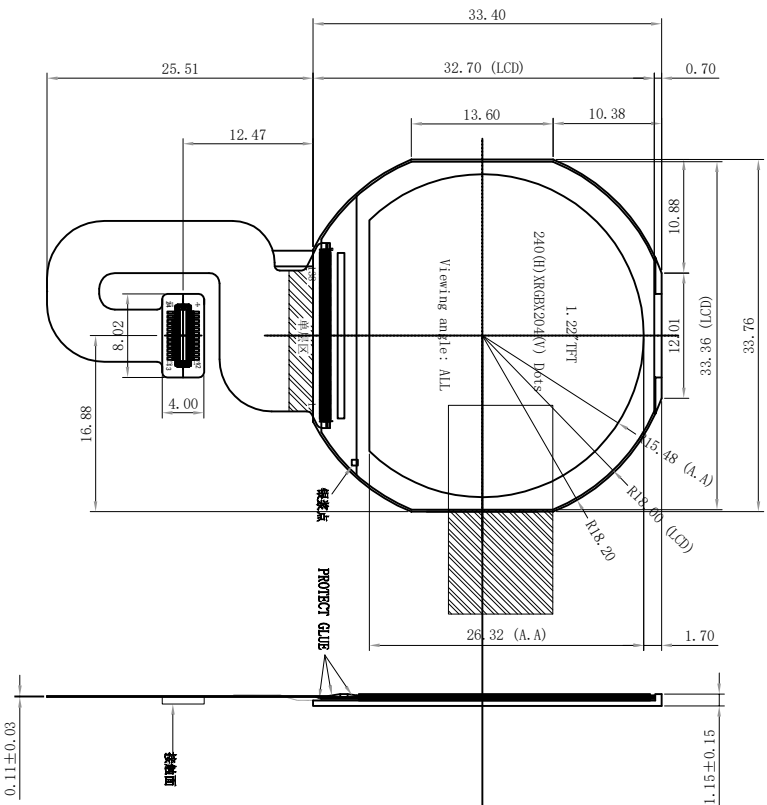

FPC弯折示意图
展开出货

FPC INTERFACE	
No.	Symbol
1	GND
2	/RESET
3	GND
4	DB8
5	DB7
6	DB6
7	DB5
8	DB4
9	DB3
10	DB2
11	DB1
12	DB0
13	IM1
14	/RD
15	/WR
16	RS
17	/CS
18	IOVCC (1.8/2.8V)
19	EMARK
20	VCI (2.8V)
21	GND
22	LEDA
23	LEDK
24	GND



注: IM1=0, DB0~DB7; IM1=1, DB0~DB8;

- Specification:
- 1). Display mode: 16.7M TFT/Transmissive
 - 2). Viewing angle: ALL 0'clock
 - 3). Operating temp.: -20°C~+60°C
Storage temp.: -20°C~+70°C
 - 4). IC: ST7789H2-G4
 - 5). Backlight: 2 chip White LED
I LED=40 mA V LED=2.8~3.3V
 - 6). General Tolerance:±0.20.
 - 7). Rohs Compliancy.
 - 8). with mark "()" are referenced

特殊工艺:

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL
0.30

AL UNITS:
MM

DATE

MODEL NUMBER :
MLT012G24-5

DO NOT SCALE THIS DRAWING.

PROJECTION

SHEET: 1 OF 1

DATE: