

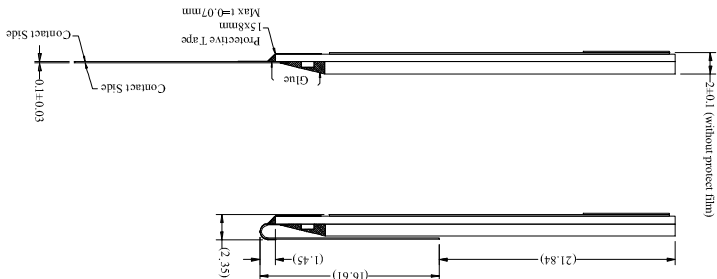


ALL PAGES OF THIS VERSION APPROVED
SIGNATURE: DATE:

Rev. Description. Date

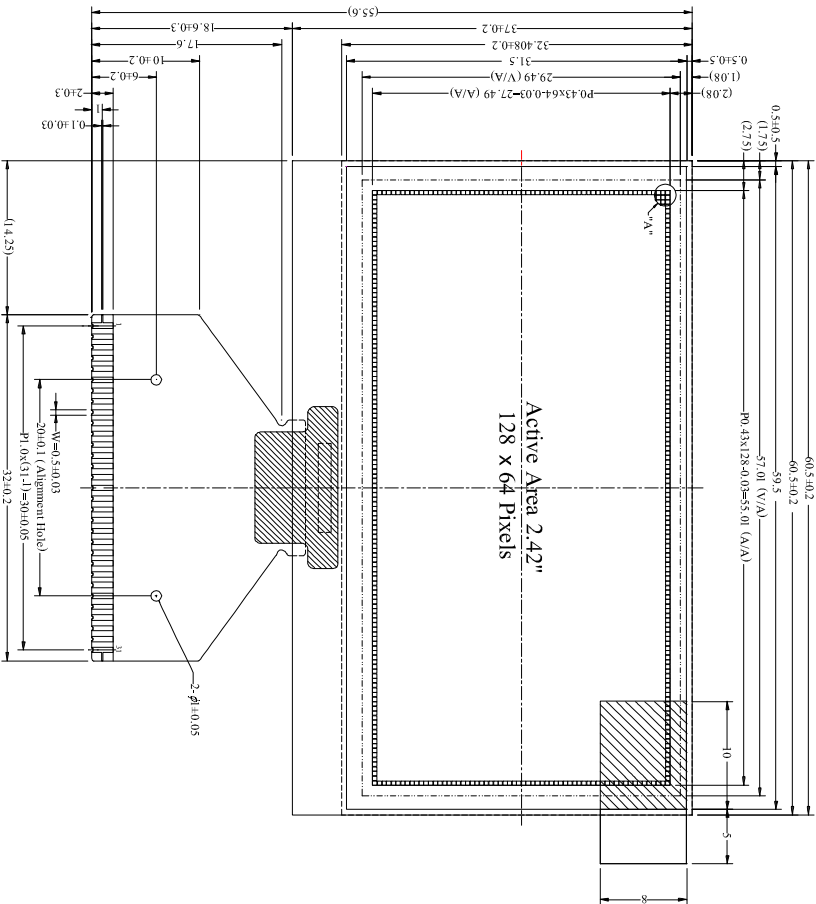

Pin	Symbol
1	N/C (GND)
2	VCC
3	VCOMH
4	REF
5	D7
6	D6
7	D5
8	D4
9	D3
10	D2
11	D1
12	D0
13	EBD+
14	EBD-
15	R/W+
16	R/W-
17	R/S+
18	C/S+
19	NC
20	BS1
21	BS2
22	N/C
23	N/C
24	N/C
25	N/C
26	N/C
27	N/C
28	N/C
29	N/C
30	VSS
31	N/C (GND)



NOTES:

1. DISPLAY TYPE: 2.42"PM_OLED/MONOCROME
2. DISPLAY COLOR: YELLOW
3. OPERATING VOLTAGE: 4.0V
4. OPERATING TEMPERATURE: -40°C~70°C
5. STORAGE TEMPERATURE: -40°C~85°C
6. DRIVE MODE: 1/64DUTY
7. DRIVER: SSD1305
8. RESOLUTION: 128X64
9. CONNECTOR: FPC
10. UNMARK TOLERANCES: ±0.03MM

特殊工艺:

MACLIGHT DISPLAY CO., LIMITED

GENERAL	TOTAL	UNITS	DATE	MODEL NUMBER :	SHEET: 1 OF 1
0.20	MM			MLD242-12864AY1	
CHK:					
APP:					
DD NOT SCALE THIS DRAWING.				PROJECTION	DATE: