
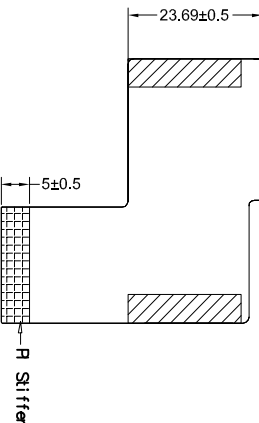
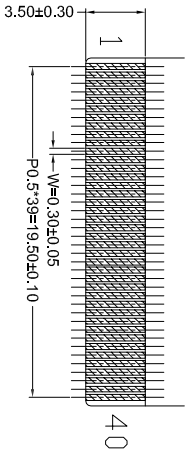



ALL PAGES OF THIS VERSION APPROVED

SIGNATURE:DATE:

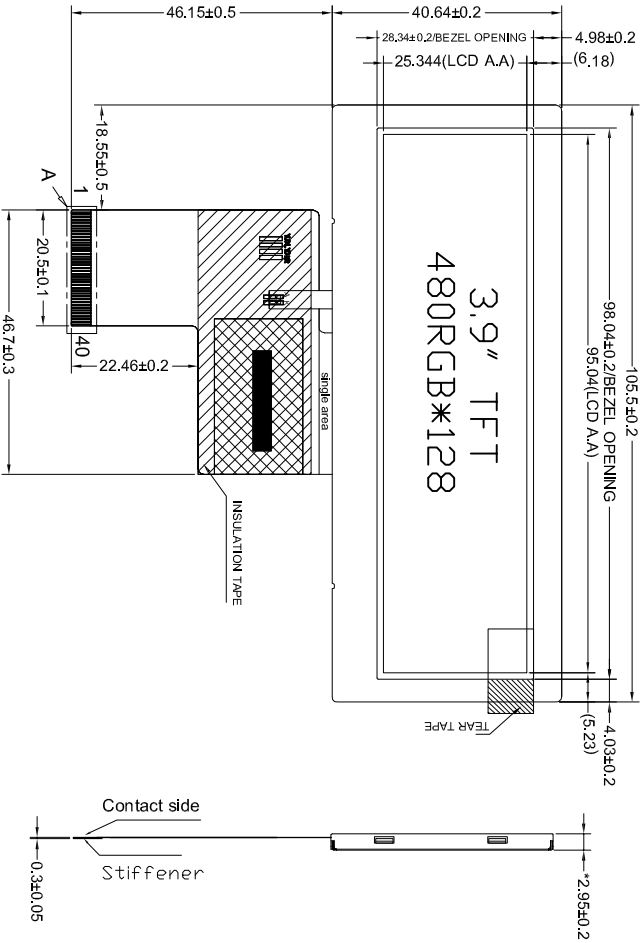

Pin definition	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
VBL-	VBL+	GND	VCC	R0	R1	R2	R3	R4	R5	R6	R7	R8	R9	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7	GND	CLK	DISP	Hsync	Vsync	DEN	NC	GND	NC	NC	NC	NC

NOTES:

1. DISPLAY TYPE:
3.9" TFT_LCD/TRANSMISSIVE
2. LCD OPERATING VOLTAGE:
3.3V
3. OPERATING TEMPERATURE:
-20°C~70°C
4. STORAGE TEMPERATURE:
-30°C~80°C
5. VIEWING ANGLE:
12 O'CLOCK
6. BACKLIGHT BRIGHTNESS:
500CD/M2
7. DRIVER:
ILI6480
8. RESOLUTION:
480(RGB)X128
9. CONNECTOR:
FPC
10. UNMARK TOLERANCES:
±0.03MM

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL ALL UNITS: 0.30 MM

DATE

MODEL NUMBER : MLT039W-S2

PROJECTION

SHEET: DF 1

DATE:

CHK:

APP:

DD NOT SCALE THIS DRAWING.

特殊工艺: