
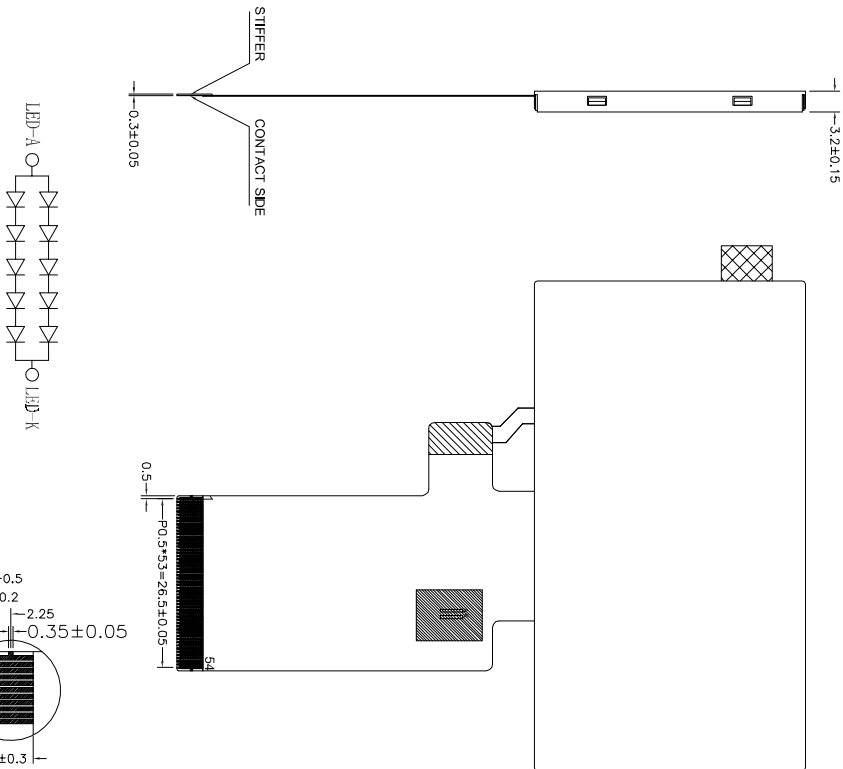


ALL PAGES OF THIS VERSION APPROVED

SIGNATURE: DATE:

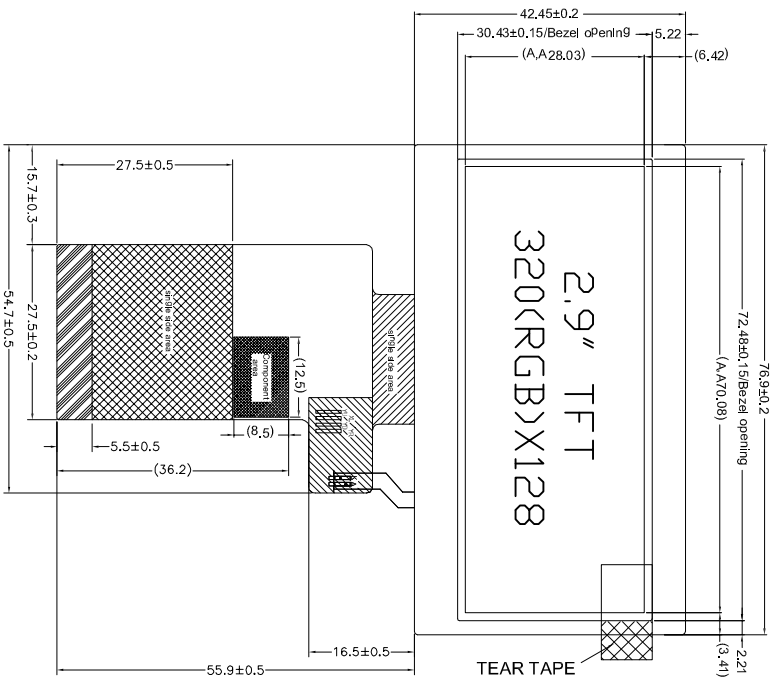

PIN	SYMBOL	Pin assignment
1	LED_K	
2	LED_K	
3	LED_A	
4	LED_A	
5	NC	
6	NC	
7	NC	
8	RESET	
9	/CS	
10	SCK	
11	S0	
12	B0	
13	B1	
14	B2	
15	B3	
16	B4	
17	B5	
18	B6	
19	B7	
20	G0	
21	G1	
22	G2	
23	G3	
24	G4	
25	G5	
26	G6	
27	G7	
28	R0	
29	R1	
30	R2	
31	R3	
32	R4	
33	R5	
34	R6	
35	R7	
36	HSYNC	
37	VSYNC	
38	DOTCLK	
39	NC	
40	NC	
41	VDD	
42	VDD	
43	NC	
44	NC	
45	NC	
46	NC	
47	NC	
48	NC(R0)	
49	NC(R0)	
50	NC(R0)	
51	NC(V0)	
52	BEN	
53	GND	
54	GND	

NOTES:

1. DISPLAY TYPE: 2.9" TFT_LCD/TRANSMISSIVE
2. LCD OPERATING VOLTAGE: 3.3V
3. OPERATING TEMPERATURE: -20°C~70°C
4. STORAGE TEMPERATURE: -30°C~80°C
5. VIEWING ANGLE: 12 O'CLOCK
6. BACKLIGHT BRIGHTNESS: 300CD/M2
7. DRIVER: HX8238
8. RESOLUTION: 320(RGB)X128
9. CONNECTOR: FPC
10. UNMARK TOLERANCES: ±0.03MM

特殊工艺:



MACLIGHT DISPLAY CO., LIMITED

GENERAL TOLL UNITS

DATE


MODEL NUMBER :

D/W/N:

CHK:

APP:

MLT029W-S1



SHEET: OF 1

DATE:

DO NOT SCALE THIS DRAWING.