



LCM PIN

PIN	SYMBOL
1	GND
2	GND
3	Rxin0-
4	Rxin0+
5	GND
6	Rxoin1-
7	Rxoin1+
8	GND
9	Rxoin2-
10	Rxoin2+
11	GND
12	RxoCLK-
13	RxoCLK+
14	GND
15	RxoIn3-
16	RxoIn3+
17	GND
18	Rxein0-
19	Rxein0+
20	GND
21	Rxein1-
22	Rxein1+
23	GND
24	Rxein2-
25	Rxein2+
26	GND
27	Rxein3-
28	Rxein3+
29	GND
30	STVD
31	GND
32	RESET
33	GND
34	VDD
35	VDD
36	VDD
37	VDD
38	VDD
39	GND
40	GND

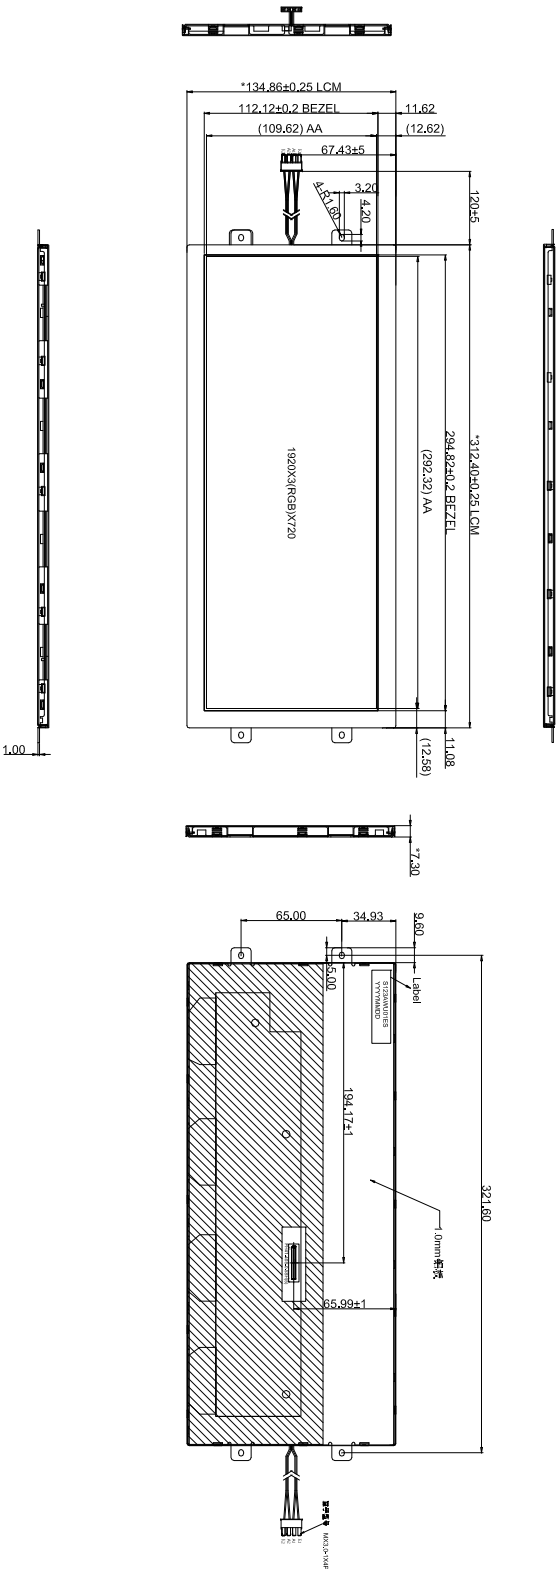

- NOTES:
1. DISPLAY TYPE: 12.3 INCH TFT /NORMALLY BLACK
 2. BACKLIGHT: 80 CHIP WHITE LED, 10S8P
VF =30±2.0V; IF = 60*8mA
 3. OPERATING TEMP: -30° C~+85° C
 4. STORAGE TEMP: -40° C~+90° c
 5. Luminance:1000cd/m2(TYP)
 6. “()”reference dimension. “*”critical dimension
 7. RoHS Compliant

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL	ALL UNITS:	DATE	MODEL NUMBER :	SHEET: 1 OF 1
0.30	MM		MLT123W-S1	
DWN:				
CHK:				
APP:			DO NOT SCALE THIS DRAWING.	DATE:
			PROJECTION	

特殊工艺: