
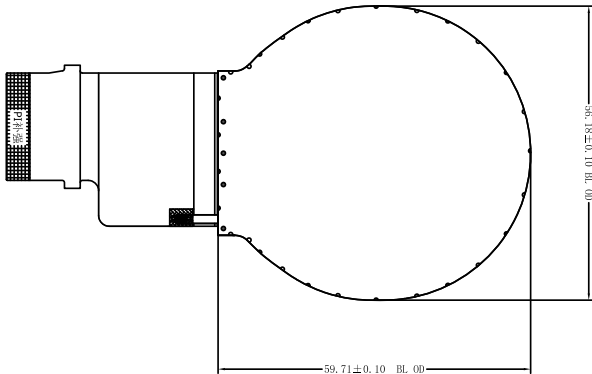
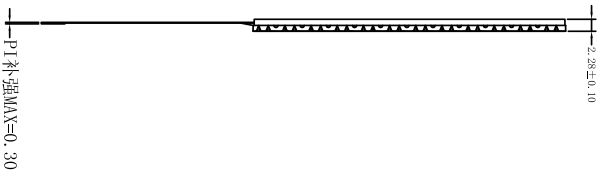


13. Outline Drawing


ALL PAGES OF THIS VERSION APPROVED	
SIGNATURE:	DATE:

REV.	Description	Date
01	New released	

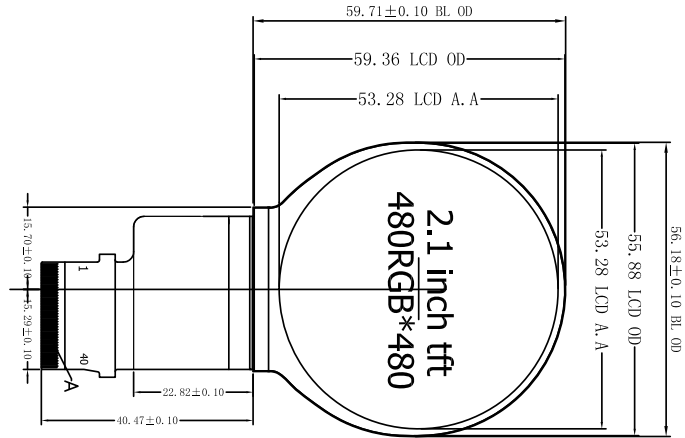


PIN
1 LED-
2 LED+
3 GND
4 VCC
5 D0
6 D1
7 D2
8 D3
9 D4
10 D5
11 D6
12 D7
13 D8
14 D9
15 D10
16 D11
17 D12
18 D13
19 D14
20 D15
21 D16
22 D17
23 D18
24 D19
25 D20
26 D21
27 D22
28 D23
29 GND
30 PCLK
31 NC
32 HS
33 VS
34 DE
35 NC
36 GND
37 RESET
38 S01
39 SCL
40 CS

背光电路图:



IM3-IM0=1010;
RGB+9b SPI(rise)

- Specification:
- 1). Display Type: 2.1" TFT LCD, Round
 - 2). Display Mode: Normally Black
 - 3). Driver IC: ST7701S
 - 4). VCC: 2.8-3.3V;
 - 5). Operating Temp.: -20°C to 70°C
Storage Temp.: -30°C to 80°C
 - 6). General Tolerance: ±0.2



特殊工艺:

GENERAL TOL. ALL UNITS: 0.30 MM		DATE	MODEL NUMBER : MLT021R40-2				SHEET: 1 OF 1	
DWN:							DATE:	
CHK:								
APP:								
			DO NOT SCALE THIS DRAWING.		PROJECTION			