ALL PAGES OF THIS VERSION APPROVED			
SIGNATURE:		DATE:	

REV.	Revision note	DATE	NAME
01	First	2017.10.30	Wuliyan
02	backlight changed	2017.11.3	Wuliyan
03	Remove double stick tape	2019.6.26	Wuliyan
04	Add black tape	2019.10.31	Wuliyan
05	Add 2 glue tape on the backlight,50mm length	2019.11.1	Wuliyan

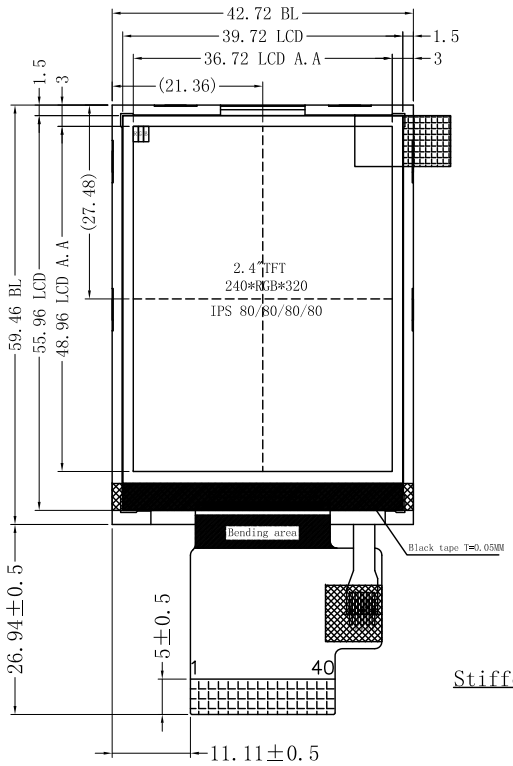

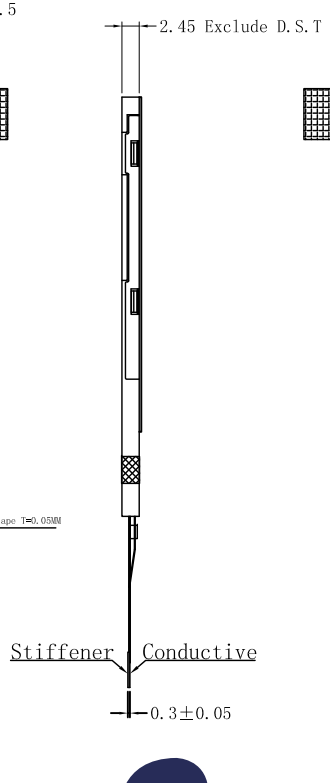

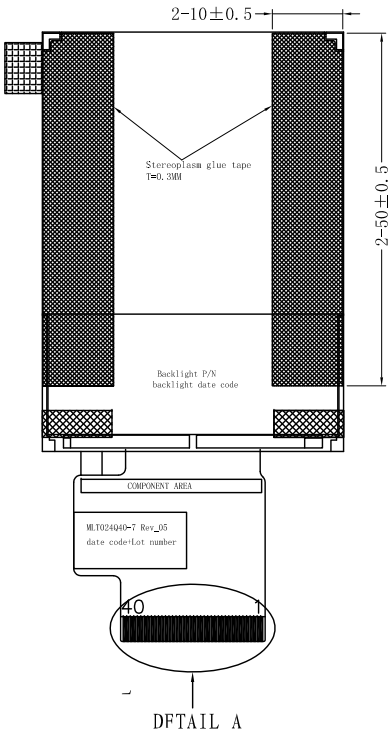

LED CIRCUIT DIAGRAM:



2*3=6EA If=60mA Vf=6V Typ

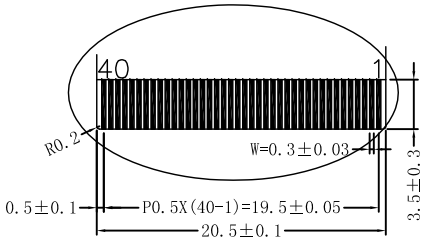

DETAIL A(2:1)

PIN ASSIGNMENT:

1	NC
2	IOVCC
3	DB17
4	DB16
5	DB15
6	DB14
7	DB13
8	DB12
9	DB11
10	DB10
11	DB9
12	DB8
13	DB7
14	DB6
15	DB5
16	DB4
17	DB3
18	DB2
19	DB1
20	DB0
21	SDA(SDI)
22	DOTCLK
23	DE
24	HSYNC
25	VSYNC
26	RD
27	WR(D/C)
28	DC(SCL)
29	CS
30	RESET
31	IM0
32	IM1
33	IM2
34	IM3
35	NC
36	GND
37	VCI
38	NC
39	LED-A
40	LED-K

NOTES:

1. DISPLAY TYPE: 2.4"TFT,TRANSMISSIVE
2. VIEWING DIRECTION : U/L/D/R 80/80/80/80
3. Driver IC : ILI9341V
4. Top : -20° C ~ 70° C, Tst : -30° C ~ 80° C
5. GENERAL TOLERANCE: ±0.2
6. LCM Luminance:LED/500cd/m²(Typical)

SYEN ELETTRONICA

05/11/2019

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL 0.30	ALL UNITS: MM	DATE	MODEL NUMBER : MLT024Q40-7		SHEET: 1 OF 1
DWN:					DATE:
CHK:					
APP:			DO NOT SCALE THIS DRAWING.	PROJECTION	

特殊工艺: