

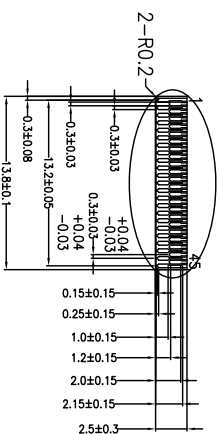
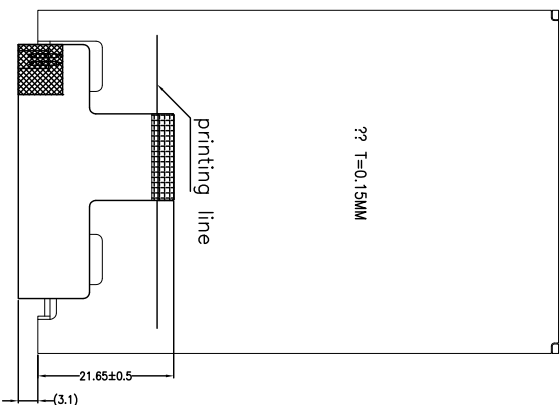


SIGNATURE:

DATE:

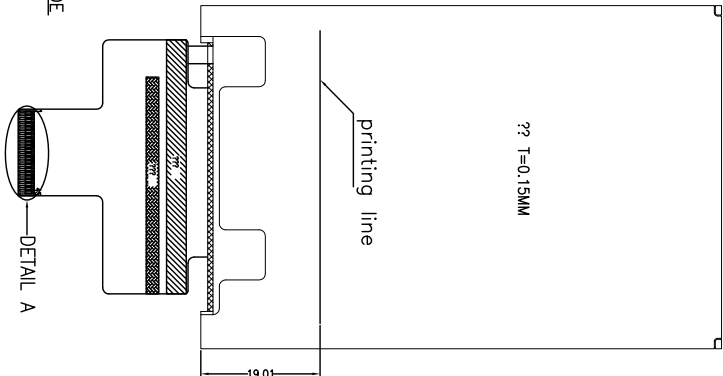

LED CIRCUIT DIAGRAM:

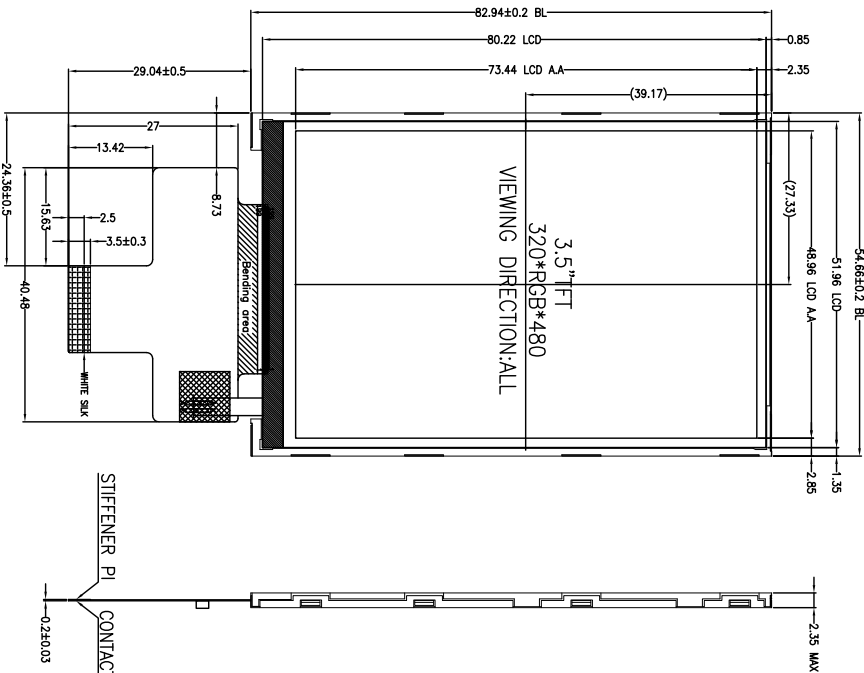

No.	PIN NAME
1	GND
2	LEDA
3	LEDK
4	VCC
5	IOVCC
6	SDO
7	SDI
8	GND
9	SCL_WR
10	CS
11	NC
12	RESET
13	R0
14	R1
15	R2
16	R3
17	R4
18	R5
19	R6
20	R7
21	G0
22	G1
23	G2
24	G3
25	G4
26	G5
27	G6
28	G7
29	B0
30	B1
31	B2
32	B3
33	B4
34	B5
35	B6
36	B7
37	DE
38	GND
39	PLK
40	GND
41	HS
42	VS
43	IC_ID
44	LED_PWM
45	GND

NOTES:

1. DISPLAY TYPE: 3.5"IPS_LCD/TRANSMISSIVE
2. VCI 2.5-3.3V
3. OPERATING TEMPERATURE: -20°C~70°C
4. STORAGE TEMPERATURE: -30°C~80°C
5. VIEWING ANGLE: ALL
6. BACKLIGHT BRIGHTNESS: 360CD/M2
7. LCD DRIVER: ILI9488
8. RESOLUTION: 320(RGB)X480
9. CONNECTOR: FPC
10. UNMARK TOLERANCES: ±0.03MM

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL ALL UNITS: 0.30 MM

DATE

MODEL NUMBER :

MLT035H45-18



SHEET: 1 OF 1

DATE:

DWN:

CHK:

APP:

DO NOT SCALE THIS DRAWING.

PROJECTION