



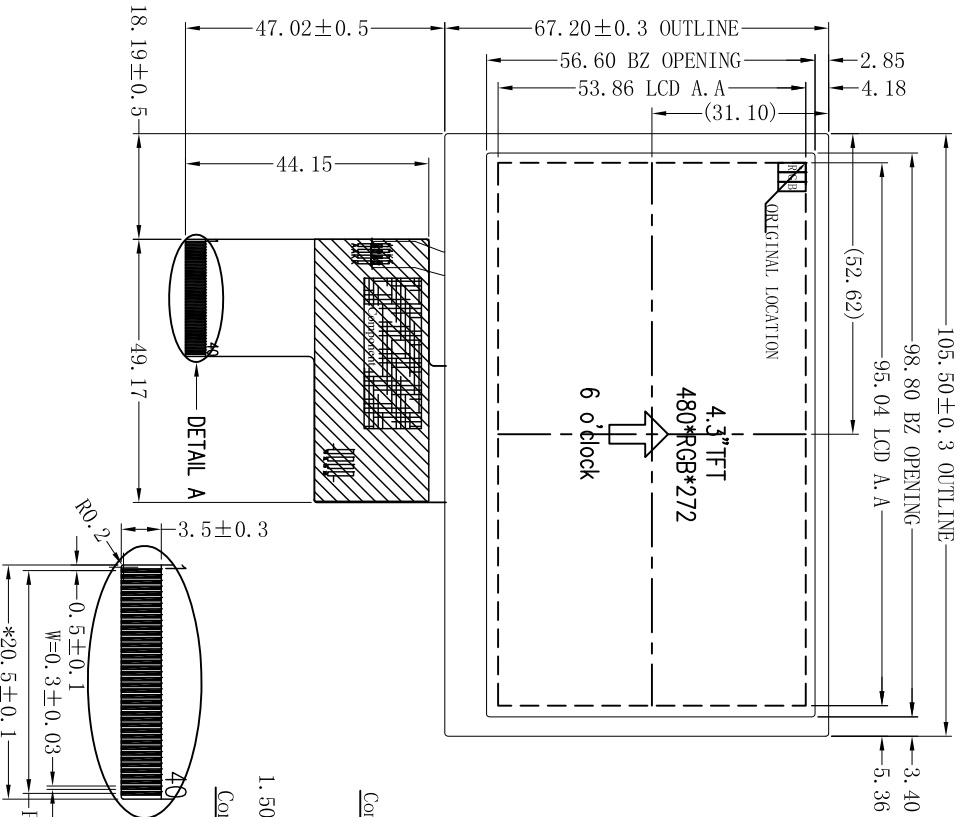

- NOTES:
1. DISPLAY TYPE: 4.3" TFT, TRANSMISSIVE
 2. VIEWING DIRECTION : U/L/D/R 55/65/65/65
 3. Driver IC : HX8257A
 4. Top : -20° C ~ 70° C, Tst : -30° C ~ 80° C
 5. GENERAL TOLERANCE: ±0.2
 6. LCM Luminance: LED/300cd/m² (Typical)

特殊工艺:

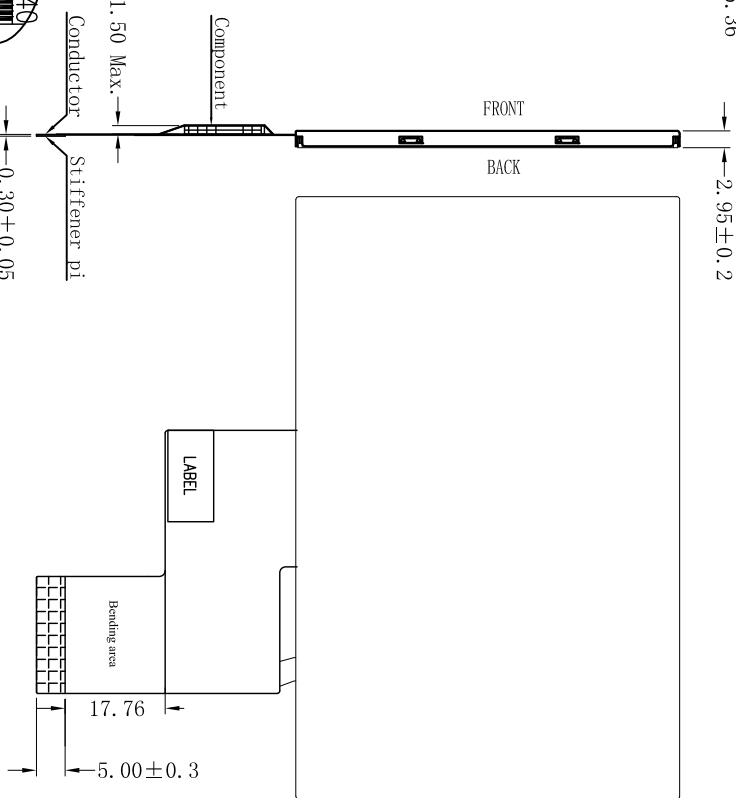

PIN	FUNCTION
1	WED-
2	WED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL	ALL UNITS:	DATE	MODEL NUMBER :	PROJECTION	SHEET: 1 OF 1
0.30	MM		MLT043R40-6		
DWN:					
CHK:					
APP:			DO NOT SCALE THIS DRAWING.		DATE: